


Everest G12R Series 500-525W

108-cell HJT Half Cell Solar Module



HJT Technology

Combining gettering process and $\mu\text{-Si}$ technology to ensure higher cell efficiency and higher module power



Sealing with PIB

Integrated coating frames ensuring modules passing the IEC salt-mist test level 8



Ideal choice for solar rooftop system

Suitable for various rooftop projects




WARRANTY

Product Warranty **15** years

Linear Power Warranty **30** years

Complete System and Product Certifications:

- IEC61215, IEC61730
- ISO9001:2015 Quality Management System
- ISO14001:2015 Environment Management System
- ISO45001:2018 Occupational Health and Safety
- IEC62941:2019 Terrestrial photovoltaic (PV) modules- Quality system for PV module manufacturing

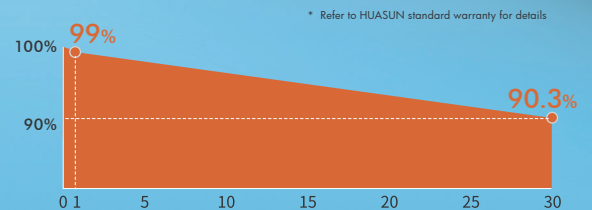

* First year power degradation < 1%
* Annual power degradation (2-30 year) ~ 0.3%
* Power output until the 30th year > 90.3%

HS-210R-S108


500-525W

- BloombergNEF Tier 1 PV module manufacturer
- Reinsurance underwritten by Ariel Re

108-Half-Cell HJT Module



Engineering Drawings

Unit: mm

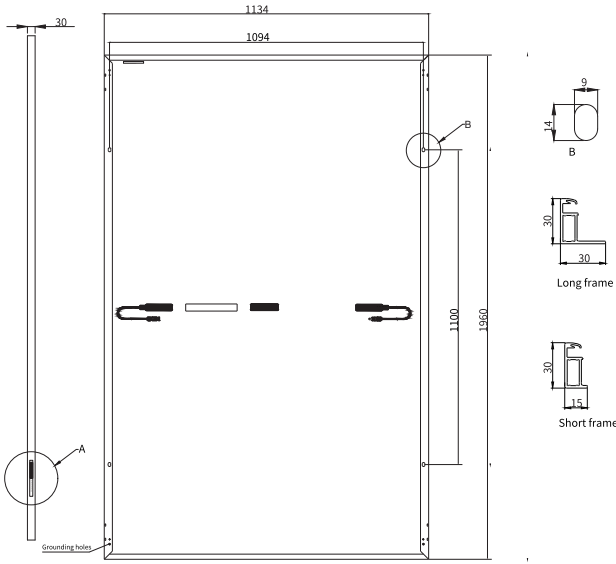

I-V Curve

(HS-210R-S108DSB500)

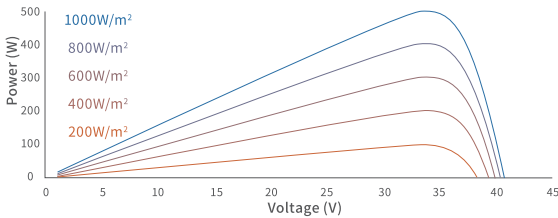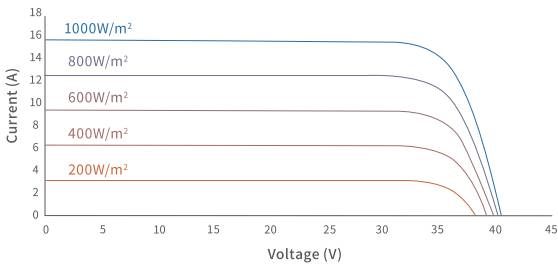

Operating Conditions

Nominal Operating Cell Temp.	44±2°C
Operating Temperature	-40~+85°C
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	30A
Tolerance of Pmax	0~+3%
Power Selection	0~+5W
Safety Class	Class II

Mechanical Characteristics

Cell Type	HJT
No. of Cells	108(6x18)
Dimensions	1960 x 1134 x 30 mm
Weight	27.4kg
Junction Box	IP68
Cable	4mm²; 1250mm or customized; UV resistant
Connector	MC4 / MC4-Evo2A / PV-H4 / Z4S-abcd / ST4
Frame	Anodized aluminum alloy frame
Max Static Load (front side/rear side)	5400Pa / 2400Pa
Glass	Dual glass, 2.0mm

Electrical Characteristics

STC

HS-210R-S108	DSB500	DSB505	DSB510	DSB515	DSB520	DSB525
Maximum Power (Pmax/W)	500	505	510	515	520	525
Module Efficiency (%)	22.5	22.7	22.9	23.2	23.4	23.6
Maximum Power Voltage (Vmp/V)	34.16	34.27	34.38	34.49	34.60	34.71
Maximum Power Current (Imp/A)	14.64	14.74	14.84	14.94	15.04	15.14
Open Circuit Voltage (Voc/V)	40.76	40.87	40.98	41.09	41.20	41.31
Short Circuit Current (Isc/A)	15.48	15.59	15.70	15.81	15.92	16.03

STC: AM1.5, 1000W/m², 25°C.

Temperature Characteristics

Temperature Coefficient of Pmax	-0.24%/°C
Temperature Coefficient of Voc	-0.22%/°C
Temperature Coefficient of Isc	+0.04%/°C

NOCT

HS-210R-S108	DSB500	DSB505	DSB510	DSB515	DSB520	DSB525
Maximum Power (Pmax/W)	381	385	389	393	397	400
Maximum Power Voltage (Vmp/V)	32.63	32.73	32.83	32.93	33.03	33.13
Maximum Power Current (Imp/A)	11.70	11.78	11.86	11.94	12.02	12.10
Open Circuit Voltage (Voc/V)	38.90	39.01	39.11	39.22	39.32	39.43
Short Circuit Current (Isc/A)	12.37	12.46	12.55	12.64	12.72	12.81

NOCT: AM1.5, 800W/m², 20°C, 1m/s.

Packaging

	40HQ
Modules Per Pallet	36
Pallets Per Container	24
Modules Per Container	864



ANHUI HUASUN ENERGY CO., LTD. All rights reserved © 2020-2024

NO.99 Qingliu Road, Economic and Technological Development Zone, Xuancheng, Anhui, China
 Tel: 0086-563-3318095 www.huasunsolar.com
 sales@huasunsolar.com customerservice@huasunsolar.com

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Anhui Huasun reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the latest version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.