



Himalaya series V-ocean

705-740W

132-cell Bifacial HJT Half Cell Double-glass Solar Module



HJT-0BB Technology

Shorter current transport path, better low-light performance, and higher power generation



Great UV resistance

Light conversion film adopted, enhancing reliability against marine harsh environment



Super-strong watertightness

Higher water resistance via double-layer coated glass, PIB all-around sealing, Evo2 original connector



Great resistibility against salt-mist

Modules passed the IEC61701 salt mist corrosion test (level 8) using thicker anodized aluminum alloy frame




Stronger wind load capacity

Strengthened frames guaranteeing modules passing 6-time IEC dynamic load test



Complete System and Product Certifications:

- IEC61215, IEC61730
- ISO9001:2015 Quality Management System
- ISO14001:2015 Environment Management System
- ISO45001:2018 Occupational Health and Safety
- IEC62941:2019 Terrestrial photovoltaic (PV) modules- Quality system for PV module manufacturing

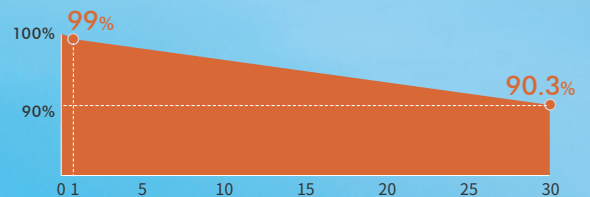

* Less than 1% attenuation in the 1st year, the annual attenuation from the 2nd year is no more than 0.3%, and the power is no less than 90.3% until the 30th year.


HSN-210-B132 705-740W

132-cell Bifacial HJT Solar Half Cell Module

- BloombergNEF Tier 1 PV module manufacturer
- Reinsurance underwritten by Ariel Re



Engineering Drawings

Unit: mm

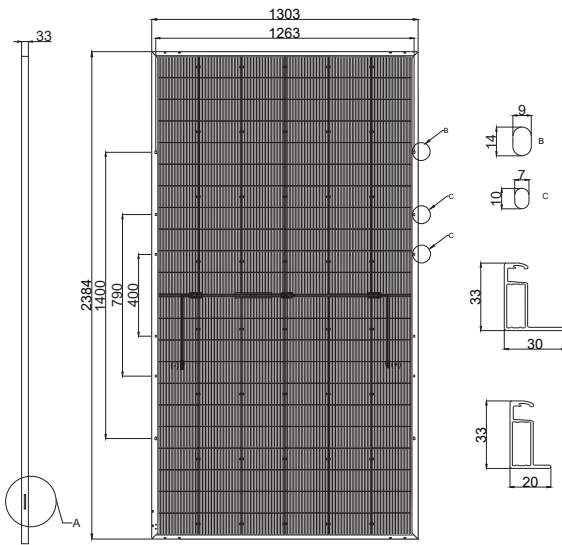

I-V Curve

(HSN-210-B132DS715)

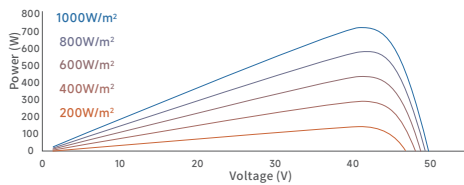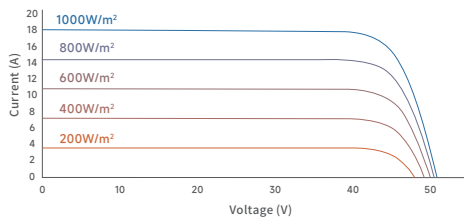

Temperature Characteristics

Temperature Coefficient of Pmax	-0.24%/°C
Temperature Coefficient of Voc	-0.22%/°C
Temperature Coefficient of Isc	+0.04%/°C

Operating Conditions

Nominal Operating Cell Temp.	44±2°C
Operating Temperature	-40~+85°C
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	35A
Tolerance of Pmax	0~+3%
Power Selection	0~+5W
Bifaciality	90±5%
Safety Class	Class II

Mechanical Characteristics

Cell Type	HJT
No. of Cells	132 (6x22)
Dimensions	2384 x 1303 x 33 mm
Weight	37.9kg
Junction Box	IP68
Cable	4mm ² ; +350/-250mm or customized; UV resistant
Connector	MC4-Evo2 / MC4-Evo2A
Frame	Aluminum alloy frame
Max Static Load (front side/rear side)	5400Pa / 2400Pa
Glass	Dual glass, 2.0mm

Electrical Characteristics

STC

HSN-210-B132	DS705	DS710	DS715	DS720	DS725	DS730	DS735	DS740
Maximum Power (Pmax/W)	705	710	715	720	725	730	735	740
Module Efficiency (%)	22.7	22.9	23.0	23.2	23.3	23.5	23.7	23.8
Maximum Power Voltage (Vmp/V)	41.87	41.96	42.05	42.14	42.23	42.32	42.41	42.50
Maximum Power Current (Imp/A)	16.84	16.93	17.02	17.10	17.18	17.26	17.34	17.42
Open Circuit Voltage (Voc/V)	49.87	49.97	50.07	50.17	50.27	50.37	50.47	50.57
Short Circuit Current (Isc/A)	17.90	17.99	18.08	18.17	18.26	18.35	18.44	18.53

STC: AM1.5, 1000W/m², 25°C.

BNPI

Maximum Power (Pmax/W)	790	796	801	807	813	818	824	829
Maximum Power Voltage (Vmp/V)	42.02	42.11	42.20	42.29	42.38	42.47	42.56	42.65
Maximum Power Current (Imp/A)	18.82	18.91	19.00	19.10	19.19	19.28	19.37	19.46
Open Circuit Voltage (Voc/V)	50.04	50.14	50.24	50.34	50.44	50.54	50.65	50.75
Short Circuit Current (Isc/A)	20.07	20.18	20.28	20.38	20.48	20.58	20.68	20.78

BSTC: AM1.5, 1000W/m², 135W/m², 25°C.

NOCT

Maximum Power (Pmax/W)	538	542	545	549	553	557	561	565
Maximum Power Voltage (Vmp/V)	40.00	40.07	40.14	40.23	40.32	40.41	40.50	40.58
Maximum Power Current (Imp/A)	13.46	13.53	13.60	13.67	13.73	13.79	13.86	13.92
Open Circuit Voltage (Voc/V)	47.60	47.69	47.79	47.88	47.98	48.08	48.17	48.27
Short Circuit Current (Isc/A)	14.31	14.38	14.45	14.52	14.59	14.67	14.74	14.81

NOCT: AM1.5, 800W/m², 20°C, 1m/s.

Packaging

	40HQ
Modules Per Pallet	33
Pallets Per Container	18
Modules Per Container	594



ANHUI HUASUN ENERGY CO., LTD. All rights reserved © 2020-2024

NO.99 Qingliu Road, Economic and Technological Development Zone, Xuancheng, Anhui, China
 Tel: 0086-563-3318095 www.huasunsolar.com
 sales@huasunsolar.com customerservice@huasunsolar.com

With the development of technology and the iterative updating of products, the technical specification of products released by HUASUN in the future may differ from those listed in this datasheet. HUASUN reserves the right to change the technical specification of the products at any time without prior notice, and the technical specification of the products ordered by the customers are subject to the technical specification agreed upon in the legally binding contract signed by both parties. The final interpretation of the datasheet is reserved by HUASUN.