


72 Half-cell Agrivoltaics HJT Module

325-335W



Through More Light, Gain More Greens.



HJT-0BB Technology

Shorter current transport path, better low-light performance, and higher power generation.




Sealing with PIB

Stronger moisture resistance, greater air impermeability to extend module lifespan.



Dual Benefits

Uniform light transmission, perfectly matching the lighting needs of agriculture, which compatibly making solar and agriculture achieve mutual benefits and added value to each sector.

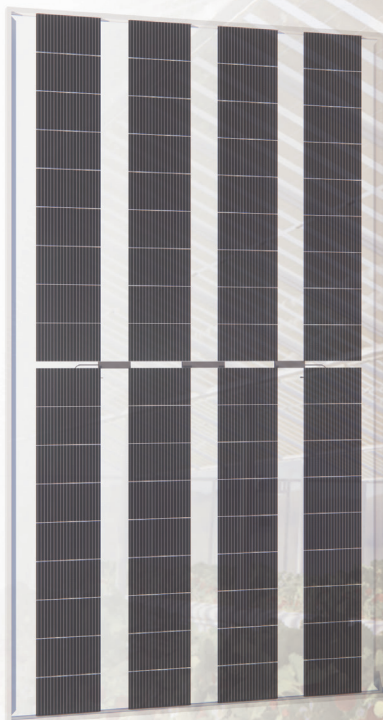


For reference only



Complete System and Product Certifications:

- IEC61215, IEC61730
- ISO9001: 2015 Quality Management System
- ISO14001: 2015 Environment Management System
- ISO45001: 2018 Occupational Health and Safety
- IEC62941: 2019 Terrestrial Photovoltaic (PV) Modules-quality System for PV Module Manufacturing
- IEC/TS62994: 2019 Photovoltaic (PV) Modules Through the Life Cycle-environmental Health and Safety (EH&S) Risk Assessment-general Principles and Nomenclature

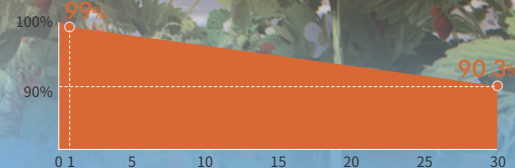

- * First year power degradation $\leq 1\%$
- * Annual power degradation (2-30 year) $\leq 0.3\%$
- * Power output until the 30th year $> 90.3\%$




HSN-210R-B72 325-335W

72-cell Bifacial HJT Solar Half Cell Module

- BloombergNEF Tier 1 PV module manufacturer
- Reinsurance underwritten by Ariel Re

Engineering Drawings

Unit: mm

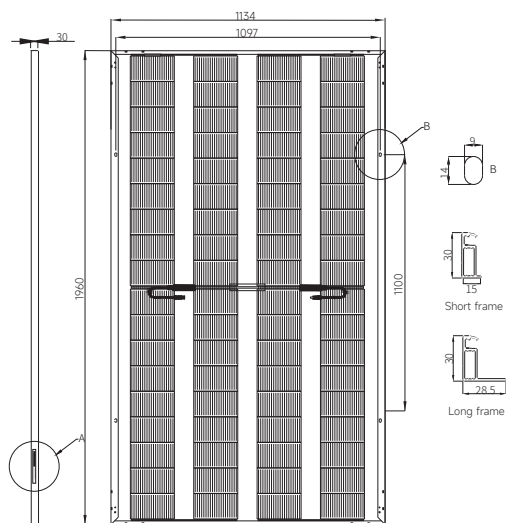

Mechanical Characteristics

Cell Type	HJT
No. of Cells	72(4x18)
Dimensions	1960x1134x30mm
Weight	26.9Kg
Junction Box	IP68
Cable	4mm ² ;+350/-450mm or customized; UV resistant
Connector	MC4 / MC4-Evo2 / MC4-Evo2A / PV-H4 / Z4S-abcd / PV-ZH202B
Frame	Anodized aluminum alloy frame
Max Static Load (front side/rear side)	5400Pa / 2400Pa
Glass	Dual glass, 2.0mm

Electrical Characteristics

STC

HSN-210R-B72	DSN325	DSN330	DSN335
Maximum Power (P _{max} /W)	325	330	335
Module Efficiency (%)	14.6	14.9	15.1
Voltage at P _{max} (V _{mp} /V)	22.70	22.85	22.99
Current at P _{max} (I _{mp} /A)	14.32	14.45	14.58
Open Circuit Voltage (V _{oc} /V)	27.07	27.23	27.39
Short Circuit Current (I _{sc} /A)	15.02	15.15	15.28

STC: AM1.5, 1000W/m², 25°C.



BNPI

Maximum Power (P _{max} /W)	364	370	375
Voltage at P _{max} (V _{mp} /V)	22.78	22.93	23.07
Current at P _{max} (I _{mp} /A)	16.00	16.14	16.29
Open Circuit Voltage (V _{oc} /V)	27.16	27.32	27.49
Short Circuit Current (I _{sc} /A)	16.84	16.99	17.14

BNPI: AM1.5, 1000W/m², 135W/m², 25°C.

I-V Curve

(HSN-210R-B72DSN335)

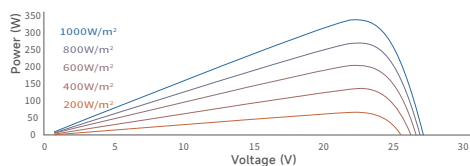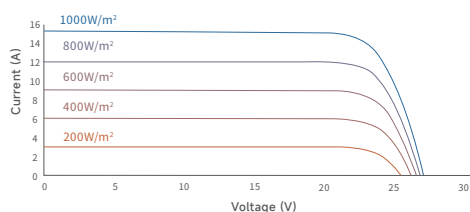

Temperature Characteristics

Temperature Coefficient of P _{max}	-0.24%/°C
Temperature Coefficient of V _{oc}	-0.22%/°C
Temperature Coefficient of I _{sc}	+0.04%/°C

Operating Conditions

Nominal Operating Cell Temp.	44±2°C
Operating Temperature	-40~+85°C
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	30A
Tolerance of P _{max}	0~+3%
Power Selection	0~+5W
Bifaciality	90±5%
Safety Class	Class II

NOCT

Maximum Power (P _{max} /W)	248	251	255
Voltage at P _{max} (V _{mp} /V)	21.68	21.82	21.96
Current at P _{max} (I _{mp} /A)	11.45	11.55	11.65
Open Circuit Voltage (V _{oc} /V)	25.84	25.99	26.14
Short Circuit Current (I _{sc} /A)	12.00	12.11	12.21

NOCT: AM1.5, 800W/m², 20°C, 1m/s.

Packaging

	40'HQ
Modules Per Pallet	36
Pallets Per Container	24
Modules Per Container	864



ANHUI HUASUN ENERGY CO., LTD. All rights reserved © 2020-2024

NO.99 Qingliu Road, Economic and Technological Development Zone, Xuancheng, Anhui, China
 Tel: 0086-563-3318095 www.huasunsolar.com
 sales@huasunsolar.com customerservice@huasunsolar.com

With the development of technology and the iterative updating of products, the technical specification of products released by HUASUN in the future may differ from those listed in this datasheet. HUASUN reserves the right to change the technical specification of the products at any time without prior notice, and the technical specification of the products ordered by the customers are subject to the technical specification agreed upon in the legally binding contract signed by both parties. The final interpretation of the datasheet is reserved by HUASUN.